



LIBERTY
ONESTEEL



Rail Track Material

Steel Rails and Trak-Lok®
Steel Sleeper Systems

Liberty OneSteel has significant experience and expertise in the production of steel rail and steel sleeper systems used extensively across the Australian railway industry. A series of major investments in our facilities has resulted in the consistent manufacture of high quality steel products.

Liberty OneSteel is proud to claim our steel rail and steel sleeper systems as Australian Made.

Liberty OneSteel gained accreditation to ISO 9001 for its manufacturing operations in 1990. Our Quality Management System supports our core values of “Safety” and “Customer” and is designed to allow us to deliver quality products in line with our “Promise to Customers” whilst not compromising on “Safety”.



CONTENTS

STEEL RAILS	2
Mechanical Properties	2
Chemical Composition	3
68kg Rail Profile	4
60kg Rail Profile	5
53kg Rail Profile	6
50kg Rail Profile	7
NZR50kg Rail Profile	8
47kg Rail Profile	9
41kg Rail Profile	10
TRAK-LOK® STEEL SLEEPER SYSTEMS	11
Introduction	11
Selection of Steel Sleepers	11
Steel Sleeper Selection – Items for Consideration	12
Steel Sleeper Typical Arrangement	12
Rolled Steel Sleeper Sections	14
Chemical Composition	14
Mechanical Properties	14
Dimensional Tolerances For Steel Sleepers	15
STANDARD TRAK-LOK STEEL SLEEPER SYSTEM GUIDE .	16
Tasmania	16
New South Wales	16
Queensland	17
South Australia	17
Western Australia	18
TRAK-LOK 2 CLIPS	19
Trak-Lok 2 Clips	19
Trak-Lok 1 Clips	20
TRAK-LOK 2 LOCK-IN SHOULDERS	21
TRAK-LOK INSULATION PADS	22
TRAK-LOK SPACERS	24
Insulated Spacers	24
Non-Insulated Spacers	25
Spacer Dimensions	28
Common Spacer Configurations	28
TURNOUT BEARERS AND SPECIAL TRACKWORK	30
TRAK-LOK INSTALLATION AND REMOVAL TOOLS	30
Spare Parts	33
Motorised Application Machines	33
CAST SLEEPER PLATES	34
Sleeper Plate Type	34
Standards	34
Hole Sizes	34
Table of Sleeper Plates	34

STEEL RAILS

Rails are manufactured and supplied by the Liberty OneSteel Whyalla steelworks in South Australia. Liberty OneSteel produces both Plain Carbon and Head Hardened rails in a range of sizes suitable for the Australasian rail market.

Liberty OneSteel manufacture steel rails in accordance with the following Liberty OneSteel Rail Technical Agreement specifications.

RT19 – 68kg AS profile

RT23 – 41kg, 50kg and 60kg AS profile

RT24 – 50kg NZ profile

RT25 – 53kg

RT27 – 47kg

These specifications detail production of rails in accordance with Australian Standard AS 1085.1-2002 with clarifications and enhancements contained therein. A copy of these specifications are available on request.

Mechanical Properties

As Rolled Rail (Plain Carbon)

Product	0.2% Proof Stress	Tensile Strength	Elongation	Surface Hardness
	MPa (min)	MPa (min)	% (min)	HB (min)
41kg Rail	-	700	8	-
47kg Rail	420	880	8	260
50kg Rail	420	880	8	260
NZR50kg Rail	420	940	8	260
53kg Rail	420	880	8	260
60kg Rail	420	880	8	260
68kg Rail	420	880	8	260

Head Hardened Rail

Product	0.2% Proof Stress	Tensile Strength	Elongation	Surface Hardness
	MPa (min)	MPa (min)	% (min)	HB (min)
50kg Rail	780	1130	9	340
NZR50kg Rail	780	1130	9	340
53kg Rail	780	1130	9	340
60kg Rail	780	1130	9	340
68kg Rail	780	1130	9	340

47kg head hardened rail availability should be enquired through Liberty OneSteel's sales team.

Chemical Composition


As Rolled Rail (Plain Carbon)

Product	Element						
	Carbon %	Manganese %	Silicon %	Phosphorous %	Sulfur %	Aluminium %	Nitrogen %
41kg Rail	0.53 to 0.69	0.60 to 0.95	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
47kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
50kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
NZR50kg Rail	0.72 to 0.82	1.00 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
53kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
60kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
68kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max

Head Hardened Rail


Product	Element						
	Carbon %	Manganese %	Silicon %	Phosphorous %	Sulfur %	Aluminium %	Nitrogen %
50kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
NZR50kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
53kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
60kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max
68kg Rail	0.65 to 0.82	0.70 to 1.25	0.15 to 0.58	0.025 max	0.025 max	0.005 max	0.010 max

68kg Rail Profile

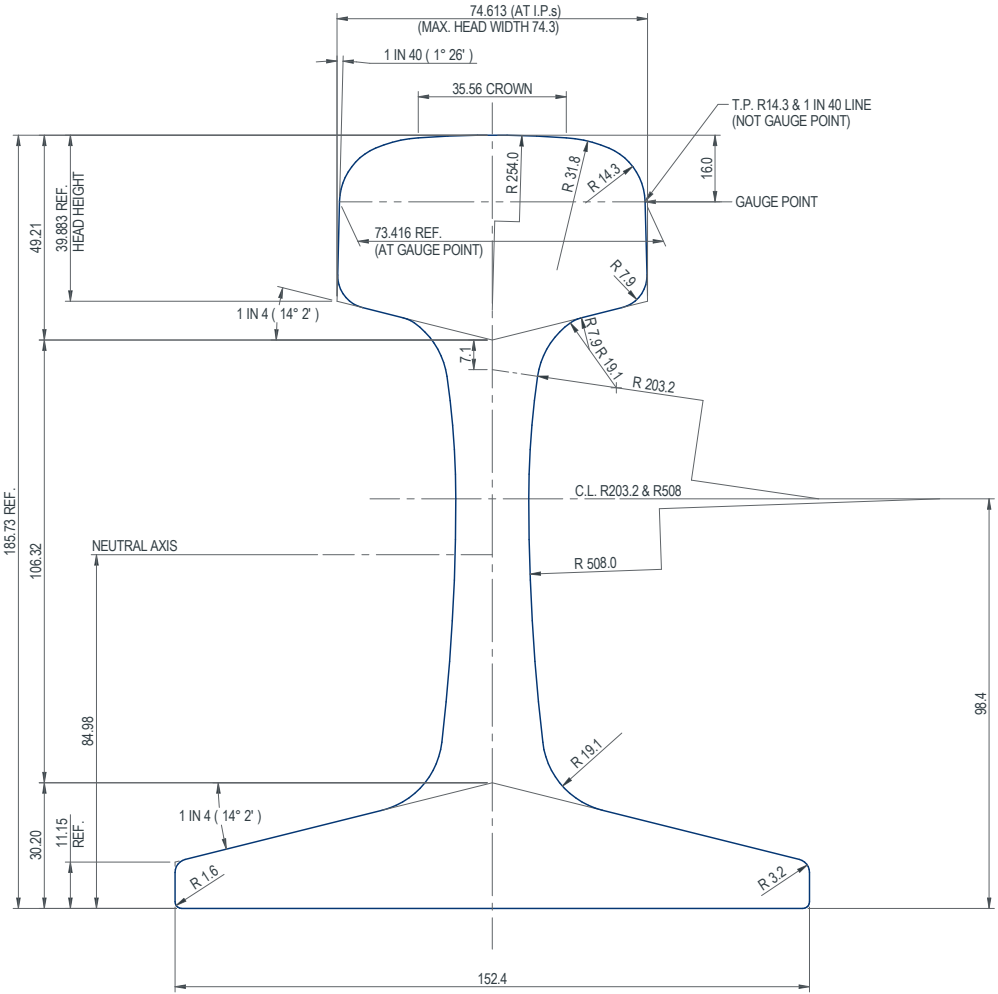


68kg Rail			
Area of Head	3,118 mm ²	Horizontal Axis	
Area of Web	2,350 mm ²	Second Moment of Area	39.4 10 ⁶ mm ⁴
Area of Foot	3,147 mm ²	Section Modulus Head	390.7 10 ³ mm ³
Total Area	8,615 mm ²	Section Modulus Foot	463.2 10 ³ mm ³
Calculated Mass	67.6 kg/m	Vertical Axis	
Maximum Rail Length	25.0 m	Second Moment of Area	6.03 10 ⁶ mm ⁴

60kg Rail Profile

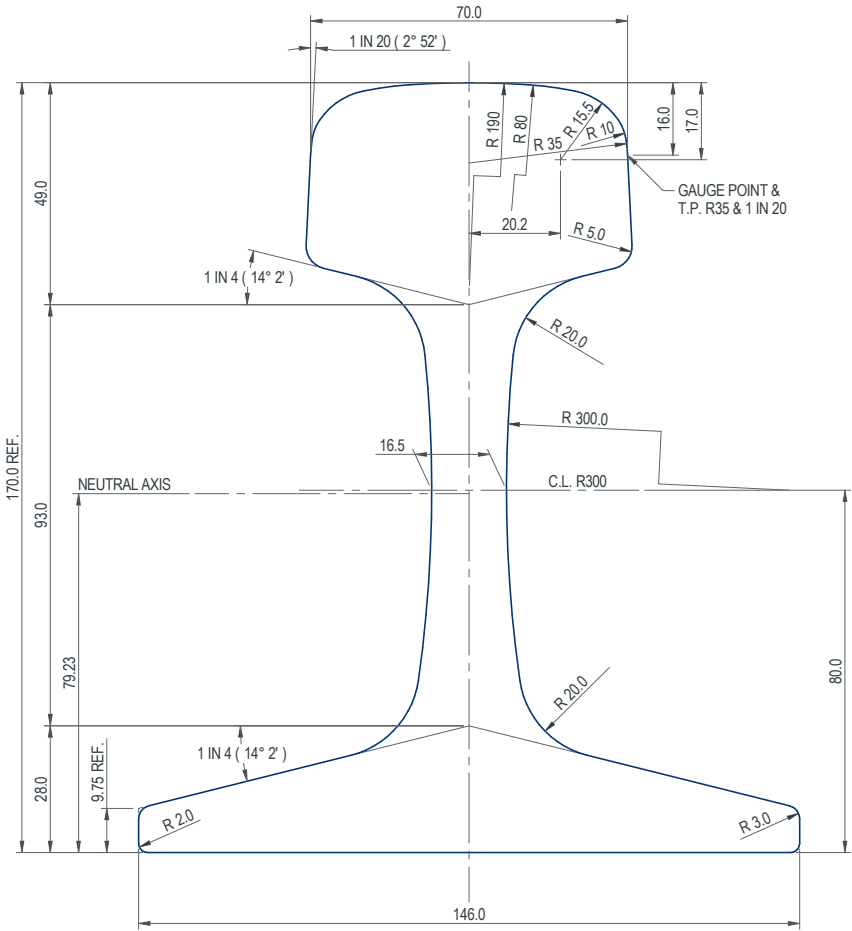

60kg Rail		
Area of Head	2,999 mm ²	Horizontal Axis
Area of Web	1,974 mm ²	
Area of Foot	2,752 mm ²	Second Moment of Area 29.3 10 ⁶ mm ⁴
Total Area	7,725 mm ²	Section Modulus Head 322.4 10 ³ mm ³
Calculated Mass	60.6 kg/m	Section Modulus Foot 369.3 10 ³ mm ³
Maximum Rail Length	27.5 m	Vertical Axis
		Second Moment of Area 4.90 10 ⁶ mm ⁴


53kg Rail Profile

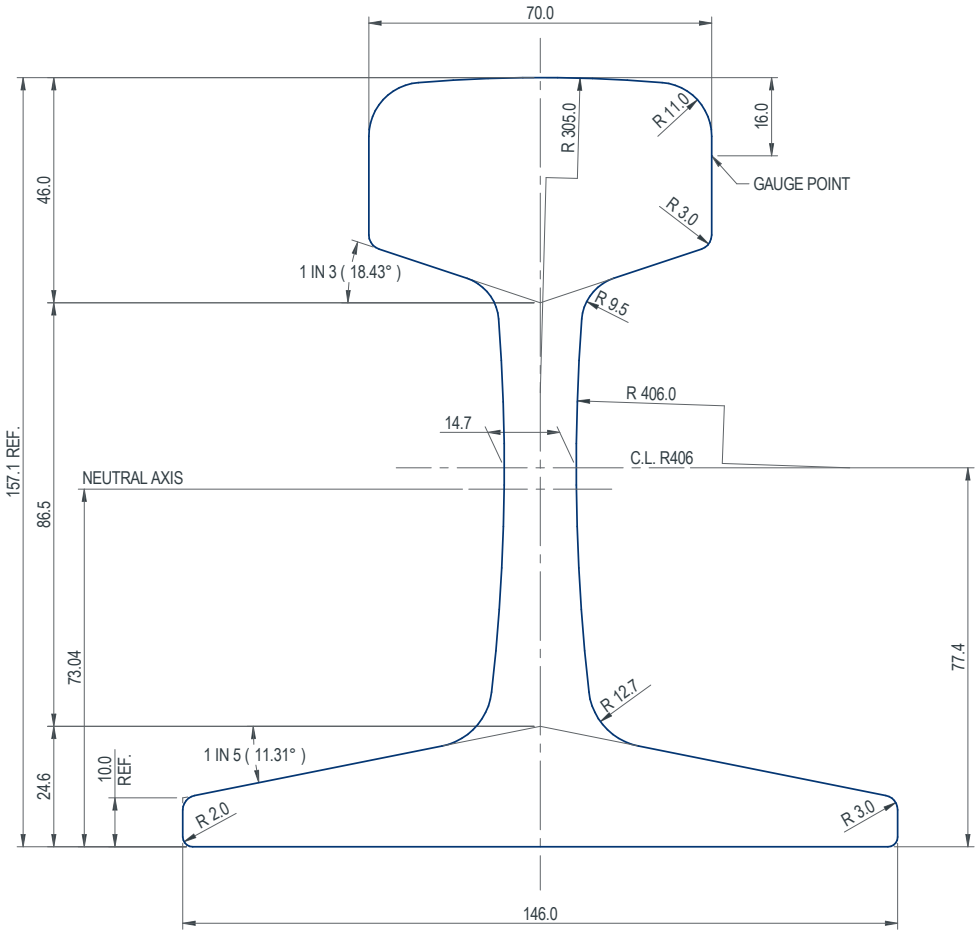

53kg Rail


Area of Head	2,721 mm ²	Horizontal Axis	
Area of Web	1,520 mm ²	Second Moment of Area	22.8 10 ⁶ mm ⁴
Area of Foot	2,522 mm ²	Section Modulus Head	271.7 10 ³ mm ³
Total Area	6,763 mm ²	Section Modulus Foot	312.7 10 ³ mm ³
Calculated Mass	53.2 kg/m	Vertical Axis	
Maximum Rail Length	27.5 m	Second Moment of Area	4.54 10 ⁶ mm ⁴

50kg Rail Profile

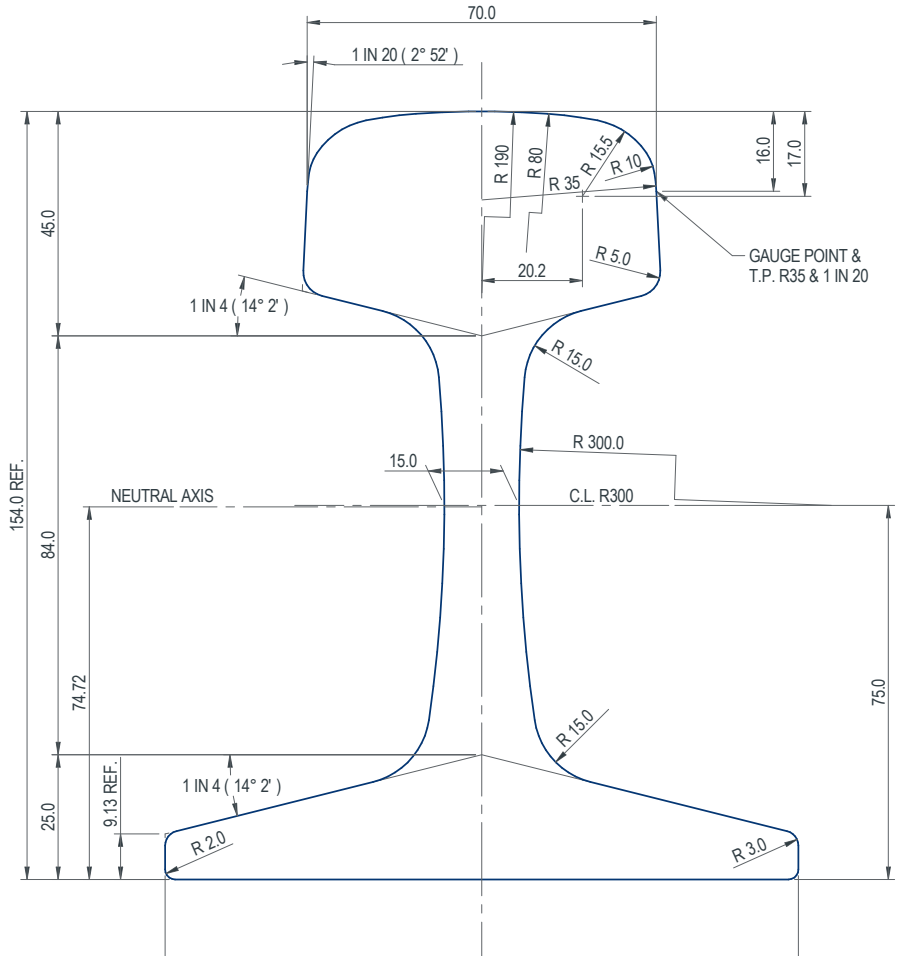


50kg Rail		
Area of Head	2,710 mm ²	Horizontal Axis
Area of Web	1,578 mm ²	
Area of Foot	2,163 mm ²	Second Moment of Area 20.1 10 ⁶ mm ⁴
Total Area	6,451 mm ²	Section Modulus Head 253.5 10 ³ mm ³
Calculated Mass	50.6 kg/m	Section Modulus Foot 269.1 10 ³ mm ³
Maximum Rail Length	27.5 m	Vertical Axis
		Second Moment of Area 3.26 10 ⁶ mm ⁴

NZR50kg Rail Profile

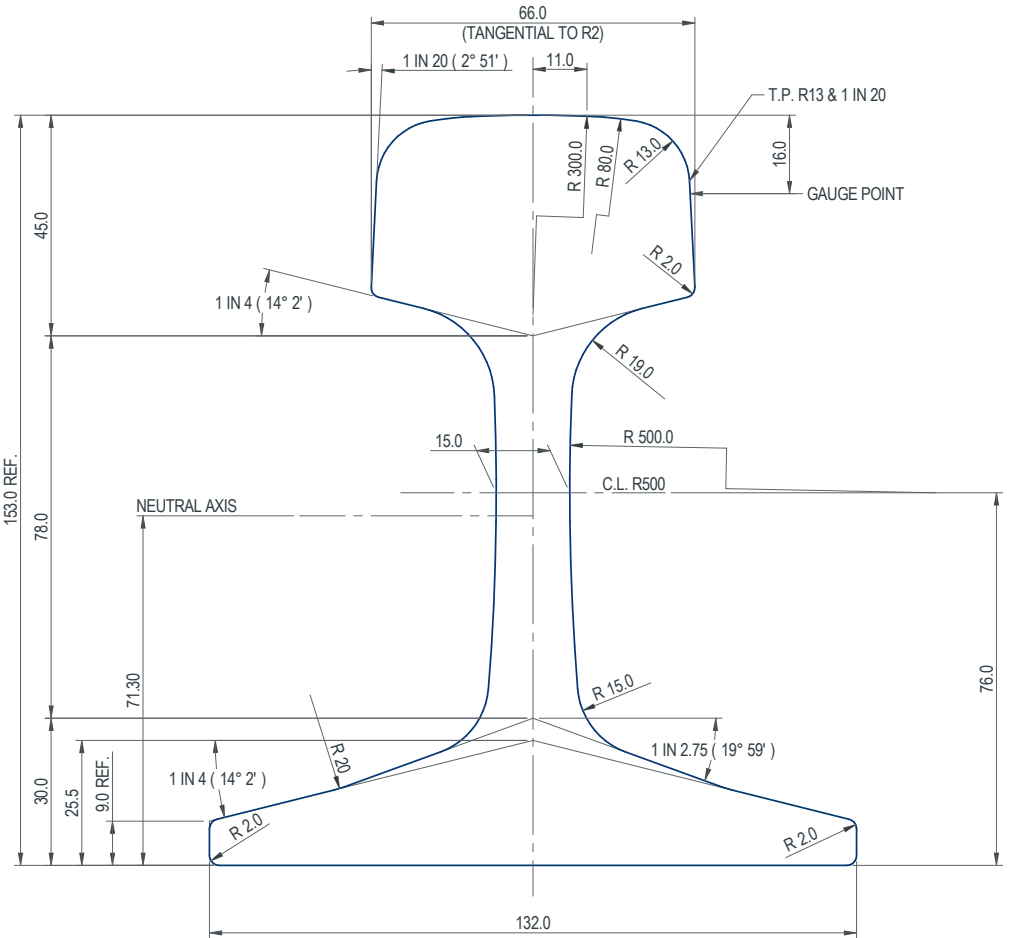

NZR50kg Rail			
Area of Head	2,536 mm ²	Horizontal Axis	
Area of Web	1,416 mm ²	Second Moment of Area	19.7 10 ⁶ mm ⁴
Area of Foot	2,453 mm ²	Section Modulus Head	241.4 10 ³ mm ³
Total Area	6,405 mm ²	Section Modulus Foot	276.6 10 ³ mm ³
Calculated Mass	50.3 kg/m	Vertical Axis	
Maximum Rail Length	27.5 m	Second Moment of Area	3.39 10 ⁶ mm ⁴


47kg Rail Profile

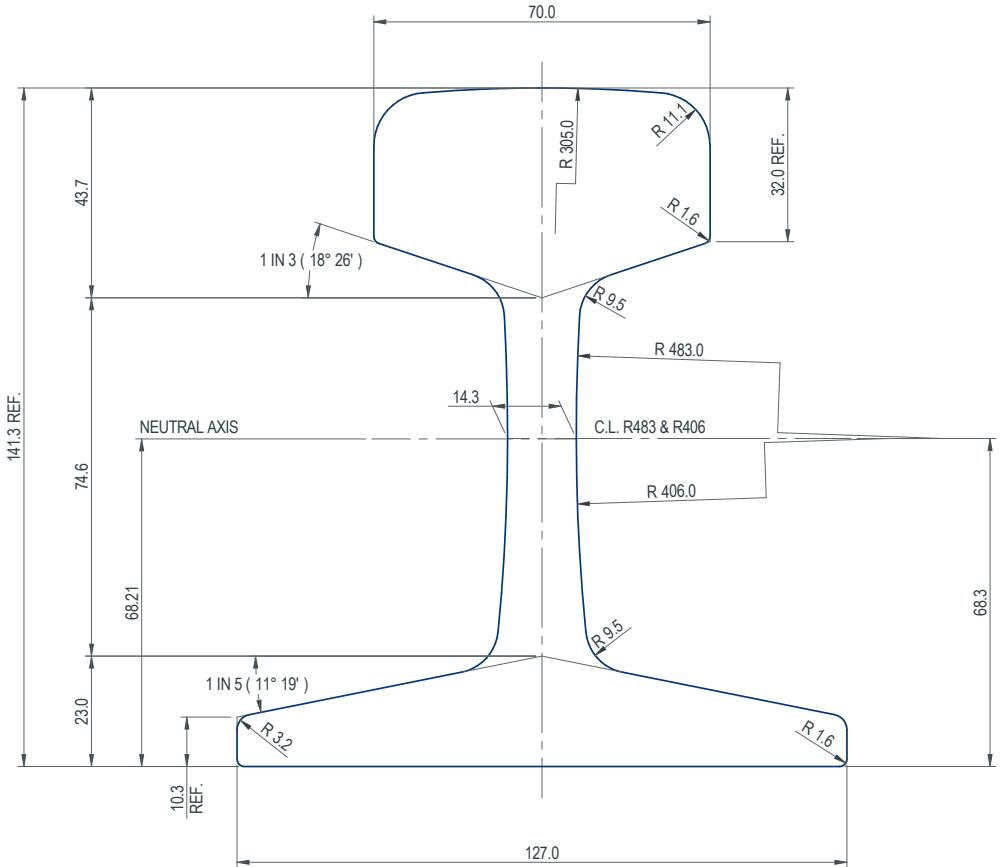

47kg Rail

Area of Head	2,561 mm ²	Horizontal Axis
Area of Web	1,235 mm ²	Second Moment of Area
Area of Foot	2,110 mm ²	Section Modulus Head
Total Area	5,906 mm ²	Section Modulus Foot
Calculated Mass	46.4 kg/m	Vertical Axis
Maximum Rail Length	27.5 m	Second Moment of Area

41kg Rail Profile

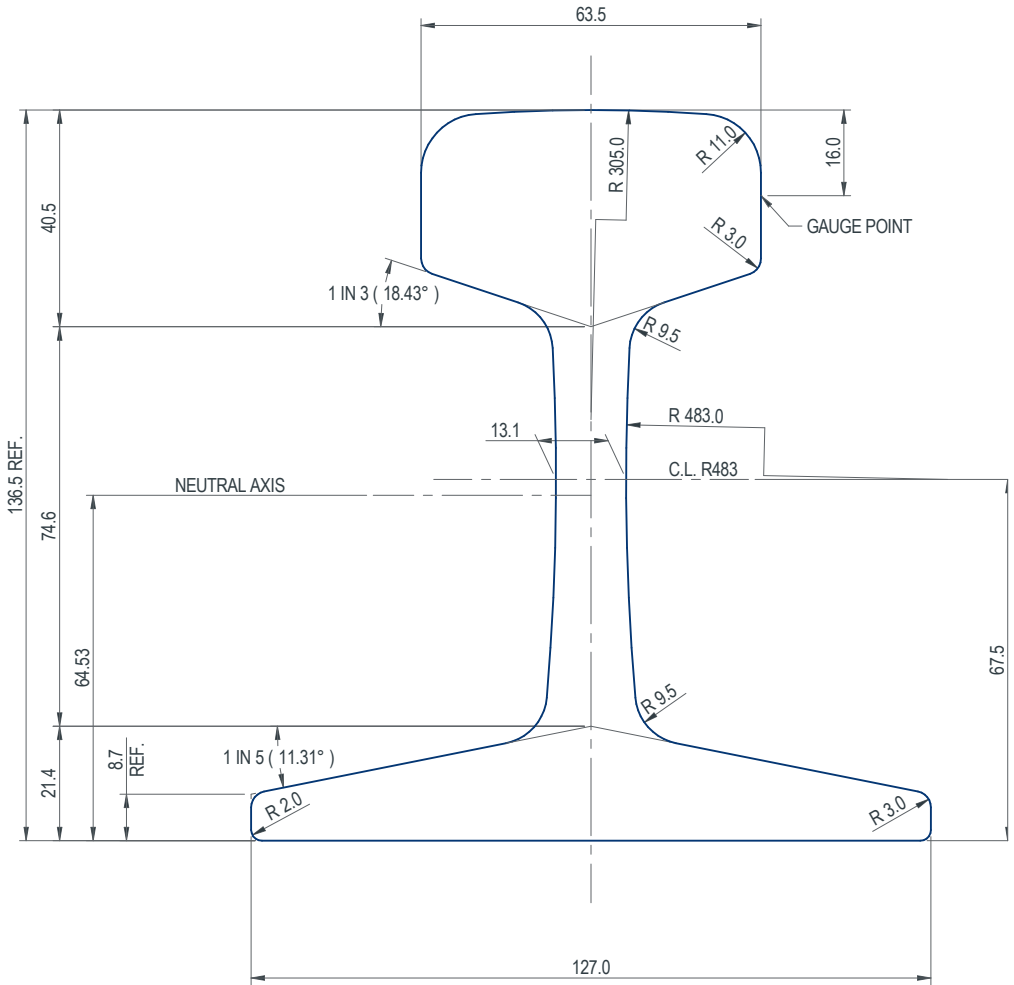

41kg Rail

Area of Head	2,162 mm ²	Horizontal Axis
Area of Web	1,122 mm ²	Second Moment of Area
Area of Foot	1,908 mm ²	Section Modulus Head
Total Area	5,192 mm ²	Section Modulus Foot
Calculated Mass	40.8 kg/m	Vertical Axis
Maximum Rail Length	27.5 m	Second Moment of Area

TRAK-LOK® STEEL SLEEPER SYSTEMS

Introduction

Trak-Lok Steel Sleeper Systems are manufactured from Liberty OneSteel's rolled "M" sleeper sections and incorporates the Trak-Lok resilient fastening system that has been developed specifically for use with steel sleepers.

Steel sleepers are support members that form part of the structure of the railway track. The steel sleepers are embedded into ballast and provide support to the rails above. The steel sleepers tie the rails together maintaining gauge and rail position whilst resisting lateral and longitudinal movement of the rail.

Recent developments in sleeper design have seen the introduction of the Deep End Spade (DES), offering improved lateral resistance to the sleeper system.

The Trak-Lok 2 resilient clip secures the rail to the sleeper in conjunction with the appropriate Trak-Lok "Lock In Shoulder".

The Trak-Lok fastening system also includes an optional range of Insulation Pads for various rail sizes that provide electrical insulation between rail and steel sleeper which ensures the correct operation of track signalling and traction current return systems.

The Trak-Lok fastening system also has a large range of Spacers available to enable the use of smaller rail in rail seats designed for larger rail sizes that may be employed in the future.

Selection of Steel Sleepers

Australian Standards AS 1085 Part 17 - Steel Sleepers and AS 1085 Part 19 - Resilient Fastening Assemblies have been developed as a means for the selection of steel sleepers and their associated resilient fastenings. The procedures specified in these standards have two main parts:

1. Firstly a design procedure that enables the calculation of design vertical and lateral rail seat loadings for the proposed sleeper (if actual loading conditions are not known); and
2. Secondly the standards specify a series of laboratory test procedures, some of which utilise the calculated design or actual loadings, to determine the performance of the proposed sleeper systems against critical performance requirements. These critical performance requirements include sleeper fatigue, overload strength, rail fastening capability and rail insulation.

In addition to the critical performance requirements specified above, other factors should also be considered, including how they are to be installed in track, assembly and disassembly of components, compatibility with common track maintenance activities and track stability.

For the first time user, in-track trials are recommended so that experience may be gained regarding installation procedure, general track performance, maintenance techniques required and general overall costs. By both in-track testing and testing in the laboratory to criteria as determined in accordance with the Australian Standards, confidence may be gained as to whether any particular sleeper system is suitable for an intended purpose.

Steel Sleeper Selection – Items for Consideration

When selecting a particular steel sleeper for your application the following items need to be determined:


1. The size of the sleeper, ie M7.5, M8.5 or M10 sleeper section. What traffic task may need to be catered for now and in the future?
2. Track gauge required to be achieved including any gauge widening;
3. What rail size is the steel sleeper to be designed for, and are Spacers required? Steel sleepers may be supplied to fasten most common rail sizes. By using Spacers it is possible to fasten existing generally small size rail in larger rail seats thus enabling future upgrading of the track to be carried out without the need to resleeper the track;
4. Is the rail seat to be canted at 1 in 20, flat, or other?
5. Is the track required to be insulated or non-insulated? What signalling task may be required in the future? Note that it is possible to convert M7.5 non-insulated track to insulated track by the use of a special Lock In Shoulder and appropriate Insulation Pads but this combination may lead to earlier fatigue failure of the steel sleeper and/or its components;
6. Improved lateral resistance for tight curves - Deep End Spade (DES).

The details presented hereafter detail the commonly used components and configurations for Trak-Lok Steel Sleeper Systems, however other specific requirements may also be able to be accommodated. Please contact a Liberty OneSteel Trak-Lok representative for further details.

Steel Sleeper Typical Arrangement



1. Insulated

(Shown with a 1 in 20 Canted Insulated Rail Seat)

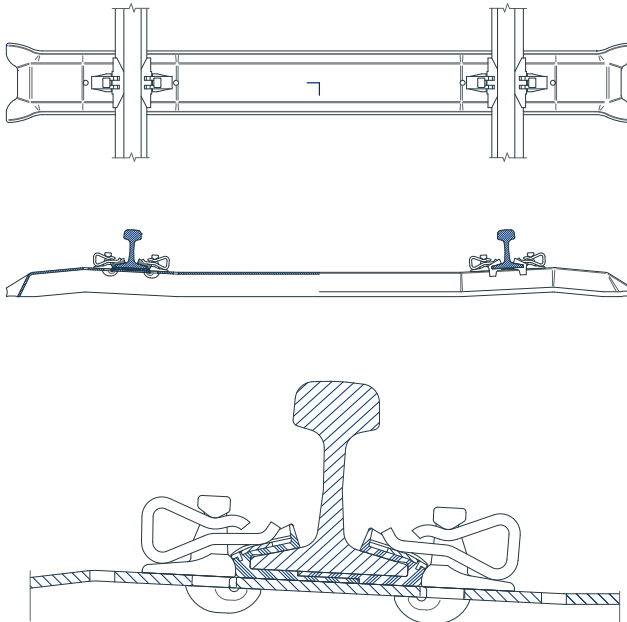


2. Non-Insulated

(Shown with Flat Non-Insulated Rail Seat)

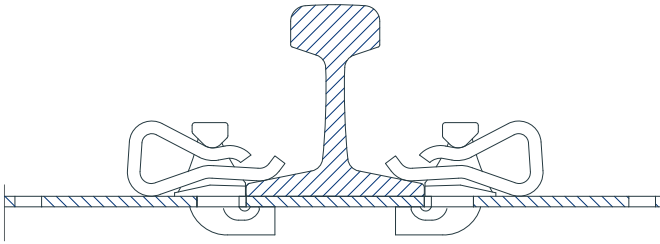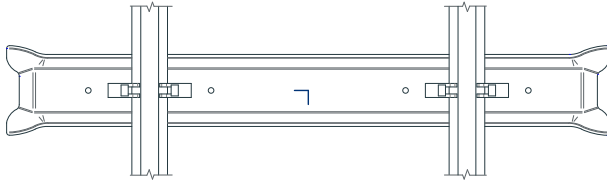


3. Deep End Spade (DES)

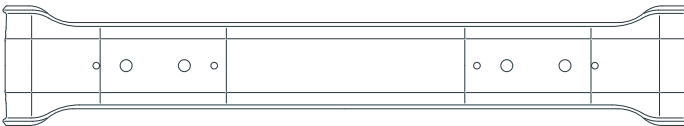

Rolled Steel Sleeper Sections

Steel sleeper sections are manufactured to the following sizes and in accordance with AS 1085.17-2003.

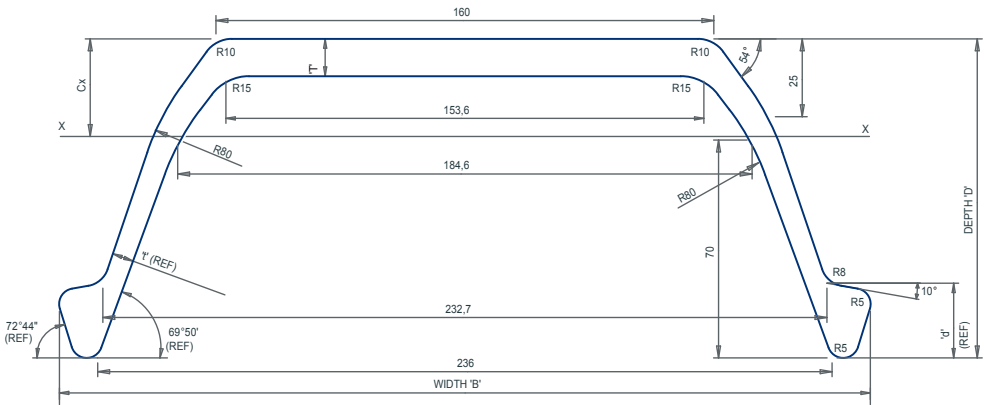

Designation	Mass kg/m	T mm	t mm	D mm	d mm	B mm	Section Area mm ²	Centre of Area (from top) mm	About x - x		
									I 10 ⁶ mm ⁴	Z top 10 ³ mm ³	Z bottom 10 ³ mm ³
M7.5	21.09	7.5	5.35	98.0	19.5	258.4	2,687	31.71	2.943	92.81	44.4
M8.5	23.14	8.5	5.69	99.0	20.5	258.7	2,948	31.43	3.217	102.35	47.61
M10	26.23	10	6.21	100.5	22.0	259.6	3,341	31.26	3.639	116.41	52.56

Chemical Composition

Product	Element				
	Carbon %, max	Manganese %, max	Silicon %, max	Phosphorous %, max	Sulfur %, max
Steel Sleeper Section	0.24	1.5	0.5	0.04	0.04

Mechanical Properties

Product	Yield Strength MPa, min
Steel Sleeper Section	250

Dimensional Tolerances For Steel Sleepers

Item No.	Characteristic	Tolerance (mm)
		as per AS1085.17
(a)	Overall length of sleeper	+/- 10
(b)	Individual cross-sectional dimensions of sleepers other than those specified in Items (c), (d) and (e)	+/- 3
(c)	Internal width of sleeper at the section toe, B	+/- 5
(d)	Overall depth of sleeper section, D	+/- 2
(e)	Thickness of the sleeper top, T	+0.5, -0.3
(f)	Inward cant of rail seats: (i) hot-pressed (ii) cold-pressed	+/- 0.5° +/- 0.2°
(g)	Rail seat flatness (flatness tolerance shall be measured in accordance with AS/NZS 1100.101) (no convexity allowed) Note: Where this tolerance is not met by special sleepers such as turnout and splay bearers, the flatness may be agreed with the purchaser.	0.0 to 1.0
(h)	Differential tilt angle of rail seats in the direction of rail	+/- 0.6°
(i)	Track gauge, measured between gauge points of rails with the rail placed hard against the outer shoulder	+/- 2
(j)	Distance between inside walls of inner and outer shoulders of each rail measured 2mm above the rail seat	+1.0, -0.0
(k)	Inside walls of inner and outer housings of each rail seat to be parallel to longitudinal axis of each rail	+/- 0.2°
(l)	Sleeper longitudinal straightness (over the nominally straight portion in plan view)	6mm/m
(m)	Distance between outer edges of external fixing holes	+/- 1
(n)	Distance between outer edges of fixing holes of the same rail seat	+/- 0.5

STANDARD TRAK-LOK STEEL SLEEPER SYSTEM GUIDE

Below is a standard list of steel sleeper configurations with the main rail size that the sleeper has been designed for and the applicable Lock In Shoulder, Insulated Pad, Clip and Spacer.

Tasmania

Sleeper Section	Gauge	Part No	Sleeper Centreline Length	Flat or Cant	Insulation Requirements		Clip No	LIS No	Spacer	Major Rail Size	Sleeper Drawing Number
					Ins or NI	Ins Part No					
M7.5	Narrow (1067mm)	7.5SN12207TSS	2010mm	Cant	NI	-	B296	2411	-	AS41	12207
M7.5	Narrow + 6mm (1073mm)	7.5SN12235TSS	2010mm	Cant	NI	-	B296	2411	-	AS41	12235
M7.5	Narrow + 12mm (1079mm)	7.5SN12236TSS	2010mm	Cant	NI	-	B296	2411	-	AS41	12236
M8.5	Narrow (1067mm)	8.5NG12136TSS	2060mm	Cant	Ins	2213	B296	2409	-	AS41	12136
M8.5	Narrow (1067mm)	8.5NG12180TSS	2060mm	Cant	NI	-	B296	2410	-	AS41	12180
M8.5	Narrow + 6mm (1073mm)	8.5NG12405TSS	2060mm	Cant	Ins	2213	B296	2409	-	AS41	12405
M8.5	Narrow + 12mm (1079mm)	8.5NG12406TSS	2060mm	Cant	Ins	2213	B296	2409	-	AS41	12406

New South Wales

Sleeper Section	Gauge	Part No	Sleeper Centreline Length	Flat or Cant	Insulation Requirements		Clip No	LIS No	Spacer	Major Rail Size	Sleeper Drawing Number
					Ins or NI	Ins Part No					
M7.5	Standard (1435mm)	7.5SG12105TSS	2430mm	Cant	NI	-	B296	2411	-	AS47	12105
M7.5	Standard (1435mm)	7.5SG2072TSS	2430mm	Cant	NI	-	B296	2411	-	AS53	2072
M8.5	Standard (1435mm)	8.5SG12125TSS	2430mm	Cant	Ins	2212	B296	2409	-	AS53	12125
M8.5	Standard (1435mm)	8.5SG12144TSS	2430mm	Cant	Ins	2213	B296	2409	-	AS47	12144
M8.5	Standard (1435mm)	8.5SG12209TSS	2430mm	Cant	NI	-	B296	2410	-	AS47/50	12209
M8.5	Standard (1435mm)	8.5SG12142TSS	2430mm	Cant	NI	-	B296	2410	-	AS53	12142
M10	Standard (1435mm)	10SG12195TSS	2430mm	Cant	Ins	2212	B296	2408	-	AS53	12195
M10	Standard (1435mm)	10SG12126TSS	2430mm	Cant	NI	-	B296	2408	-	AS60	12126

Queensland

Sleeper Section	Gauge	Part No	Sleeper Centreline Length	Flat or Cant	Insulation Requirements		Clip No	LIS No	Spacer	Major Rail Size	Sleeper Drawing Number
					Ins or NI	Ins Part No					
M7.5	Narrow (1067mm)	7.5NG2065TSS	2060mm	Flat	NI	-	B296	2411	-	AS41	2065
M7.5	Narrow (1067mm)	7.5NG2068TSS	2060mm	Flat	NI	-	B296	2411	2529	AS41 & AS50	2068
M8.5	Narrow + 7mm or +13 (1074mm and 1080mm)	8.5NG12393TSS	2060mm	Flat	NI	-	B296	2410	2529	AS41	12393
M8.5	Narrow (1067mm)	8.5NG2074TSS	2060mm	Flat	Ins	2214	B296	2409	-	AS41 & AS50	2074
M8.5	Narrow (1067mm)	8.5NG2089TSS	2060mm	Cant	Ins	2214	B296	2409	-	AS41 & AS50	2089

South Australia

Sleeper Section	Gauge	Part No	Sleeper Centreline Length	Flat or Cant	Insulation Requirements		Clip No	LIS No	Spacer	Major Rail Size	Sleeper Drawing Number
					Ins or NI	Ins Part No					
M10	Narrow (1067mm)	10NG12152TSS	2060mm	Cant	Ins	2213	B296	2408	-	AS41	12152
M7.5	Standard (1435mm)	7.5SG12402TSS	2430mm	Cant	NI	-	B296	2411	-	AS60	12402
M10	Standard (1435mm)	10SG12126TSS	2430mm	Cant	NI	-	B296	2406	-	AS60	12126
M7.5	Narrow (1067mm)	7.5SN12129TSS	2010mm	Flat	NI	-	B296	2411	-	AS31	12129
M7.5	Narrow (1067mm)	7.5SN12391TSS	2010mm	Cant	NI	-	B296	2411	-	AS53	12391

Western Australia





Sleeper Section	Gauge	Part No	Sleeper Centreline Length	Flat or Cant	Insulation Requirements		Clip No	LIS No	Spacer	Major Rail Size	Sleeper Drawing Number
					Ins or NI	Ins Part No					
M7.5	Narrow (1067mm)	7.5SN12185TSS	2010mm	Cant	NI	-	B286	2411	-	AS41	12185
M7.5	Narrow (1067mm)	7.5SN12187TSS	2010mm	Cant	NI	-	B286	2411	-	AS50	12187
M7.5	Narrow (1067mm)	7.5SN12410TSS	2010mm	Cant	NI	-	B286	2411	-	AS47/50	12410
M7.5	Narrow (1067mm)	7.5SN12260TSS	2010mm	Cant	NI	-	B286	2411	-	RE66	12260
M7.5	Narrow + 6mm (1073mm)	7.5SN12202TSS	2010mm	Cant	NI	-	B286	2411	-	AS50	12202
M8.5	Narrow (1067mm)	8.5NG2095TSS	2060mm	Cant	Ins	2213	B296	2409	-	AS41	2095
M8.5	Narrow (1067mm)	8.5NG12120TSS	2060mm	Cant	Ins	2213	B296	2409	-	AS50	12120
M8.5	Narrow (1067mm)	8.5NG12369TSS	2060mm	Cant	Ins	2212	B296	2409	-	AS60	12369
M8.5	Narrow + 6mm (1073mm)	8.5NG12160TSS	2060mm	Cant	Ins	2213	B296	2409	-	AS50	12160
M10	Narrow (1067mm)	10NG12152TSS	2060mm	Cant	Ins	2213	B296	2408	-	AS41	12152
M7.5	Standard (1435mm) (1434mm with AS50)	7.5SG12231TSS	2430mm	Cant	NI	-	B286	2411	2529	AS41 & AS47/50	12231
M7.5	Standard (1435mm)	7.5SG2096TSS	2430mm	Cant	NI	-	B286	2411	-	AS41	2096
M7.5	Standard (1435mm)	7.5SG2097TSS	2430mm	Cant	NI	-	B286	2411	-	AS50	2097
M7.5	Standard + 6mm (1441mm)	7.5SG12157TSS	2430mm	Cant	NI	-	B286	2411	-	AS50	12157
M8.5	Standard (1435mm)	8.5SG12171TSS	2430mm	Cant	Ins	2213	B296	2409	-	AS41	12171
M8.5	Standard (1435mm)	8.5SG2098TSS	2430mm	Cant	Ins	2213	B296	2409	-	AS50	2098
M8.5	Standard (1435mm)	8.5SG12266TSS	2430mm	Cant	Ins	2212	B296	2409	-	AS60	12266
M8.5	Standard (1435mm)	8.5SG12232TSS	2430mm	Cant	Ins	2214	B296	2409	-	AS41 & AS47/50	12232
M8.5	Standard + 6mm (1441mm)	8.5SG12158TSS	2430mm	Cant	Ins	2213	B296	2409	-	AS50	12158

TRAK-LOK 2 CLIPS

Trak-Lok Steel Sleeper Systems supplied by Liberty OneSteel incorporate the Trak-Lok Fastening System which has been specifically developed for use with steel sleepers. The Trak-Lok B296 clip is most commonly used. A lower toe load version, the Trak-Lok B286 clip, is also used in some applications. Trak-Lok clips are manufactured from a high silicon spring steel and are hot formed, quenched and tempered in a semi-automatic process. All clips are manufactured in accordance with AS 1085.19-2003.

Liberty OneSteel Whyalla also manufacture and supply as spares the superseded Trak-Lok 1 clips that were used on the Trak-Lok 1 Steel Sleepers (now obsolete).

Trak-Lok 2 Clips

Designation	Where Used	Drawing
B286 ^{Note 1}	For use with Insulated and Non-Insulated M7.5, M8.5 and M10 Steel Sleepers. Material thickness = 8mm Nominal Toe Load = 9kN Nominal Deflection = 16mm	
B296 ^{Note 1}	For use with Insulated and Non-Insulated M7.5, M8.5 and M10 Steel Sleepers. Material thickness = 9mm Nominal Toe Load = 10kN Nominal Deflection = 16mm	
JB296 ^{Note 1}	For use with Insulated and Non-Insulated M7.5, M8.5 and M10 Steel Sleepers at Insulated Joints. Material thickness = 9mm	
Zip9 ^{Note 2}	For use with Insulated and Non-Insulated M7.5, M8.5 and M10 Steel Sleepers. Material thickness = 9mm Nominal Toe Load = 10kN Nominal Deflection = 16mm	

Note 1 Australian Design No. 142843. All rights reserved.

Note 2 Australian Patent No. 774152. All rights reserved.




Trak-Lok 1 Clips

Designation	Where Used	Drawing
S187L	<p>Used with Non-Insulated M7.5 and M8.5 Trak-Lok 1 Steel Sleepers.</p> <p>Material thickness = 8mm Nominal Toe Load = 9kN Nominal Deflection = 10.5mm</p>	
S193L	<p>Used with Insulated M7.5, M8.5 and M10 Trak-Lok 1 Steel Sleepers.</p> <p>Material thickness = 9mm Nominal Toe Load = 10kN Nominal Deflection = 13.5mm</p>	
S195L	<p>Used with Non-Insulated M6.5 Trak-Lok 1 Steel Sleepers.</p> <p>Material thickness = 7mm Nominal Toe Load = 8kN Nominal Deflection = 10.5mm</p>	<p>Note: Use S187L Clip as replacement.</p>
S197L	<p>Used with Non-Insulated M7.5 and M8.5 Trak-Lok 1 Steel Sleepers.</p> <p>Material thickness = 9mm Nominal Toe Load = 10kN Nominal Deflection = 10.5mm</p>	

TRAK-LOK 2 LOCK-IN SHOULDERS

The Trak-Lok 2 clips used in this system are held in position by purpose designed lock-in shoulders (LIS's) which hold the rail in the rail seat and ensure the clip exerts the required toe load to the rail. The Trak-Lok 2 LIS's are specifically designed so that they cannot be dislodged once the rails are positioned in place. Different types of LIS's are used for insulated and non-insulated sleepers.

All LIS's are manufactured in accordance with AS 1085.19-2003.

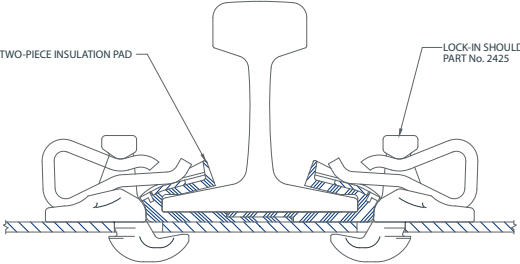Part Number	Where Used	Drawings
2411 ^{Note 1}	M7.5 Non-Insulated Steel Sleeper.	
2410 ^{Note 1}	M8.5 Non-Insulated Steel Sleepers.	
2406 ^{Note 1}	M10 Non-Insulated Steel Sleepers.	
2409 ^{Note 2}	M8.5 Insulated Steel Sleepers.	
2408 ^{Note 2}	M10 Insulated Steel Sleepers.	
2425 ^{Note 2}	Conversion of M7.5 Non-Insulated to M7.5 Insulated Steel Sleepers.	 <p style="text-align: center;">NON-INSULATED FASTENING ARRANGEMENT CONVERTED TO INSULATED FASTENING ARRANGEMENT</p>

Note 1 Australian Design No. 129140. All rights reserved.

Note 2 Australian Design No. 129139. All rights reserved.






TRAK-LOK INSULATION PADS

For rail fastening assemblies which require the rail to be insulated for signalling and return traction current control purposes, Liberty OneSteel supplies a range of two-piece insulation pads. These pads have been developed to provide high electrical resistance, good mechanical strength and durability. Insulation pads are available for most common Australian rail foot sizes. Two-piece insulation pads for use at bar type fishplated joints are also available and some pads also have a feature that allows minor adjustment of track gauge or allows the use of different rail sizes.

Trak-Lok Two-Piece Insulation pads are manufactured from two different materials to give two ranges of mechanical strength. Most insulation pads supplied are manufactured from High Density Polyethylene (HDPE). However, where high lateral forces are applied at the rail seat and higher mechanical strength is required, then insulation pads manufactured from Nylon 6 may be supplied.

All Insulation Pads are manufactured in accordance with AS 1085.19-2003.

Designation	Suit Rail	Rail Foot Width	Drawing	
2211 Not adjustable	RE68kg / 136lb	152mm		
2212 Not adjustable	AS53kg, AS60kg	146mm		
2213 Not adjustable	AS41kg, AS47kg and AS50kg	127mm		
2209 Not adjustable	RE115 / 119lb	5.5"		
2234 Not adjustable	AS31 / DKA42	108mm		
2237 Not adjustable	RE100	5.375"		
2208 Gauge Adjustable	NZR50kg	132mm	<p>WHITE IDENTIFICATION BUTTON PART No. 2210 (IN THICK SIDED PAD ONLY)</p>	
2214 Gauge Adjustable	AS41kg, AS47kg and AS50kg	127mm		

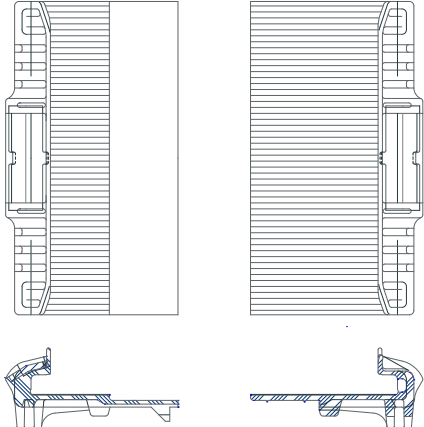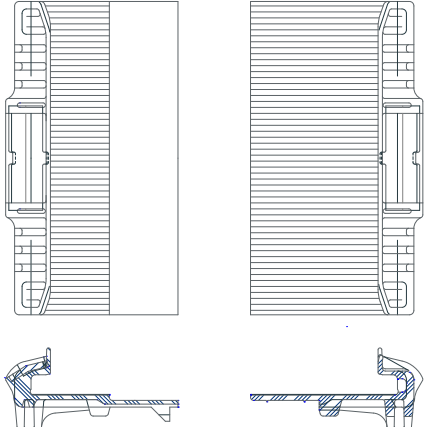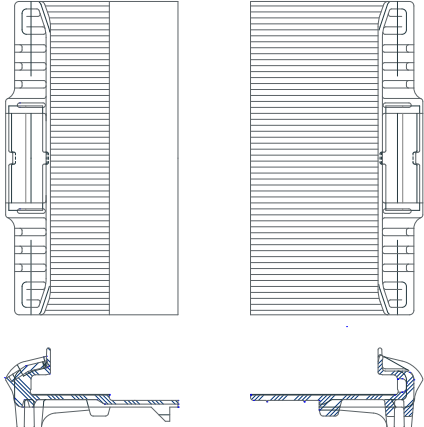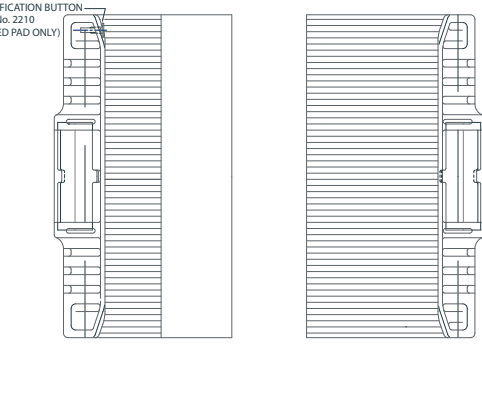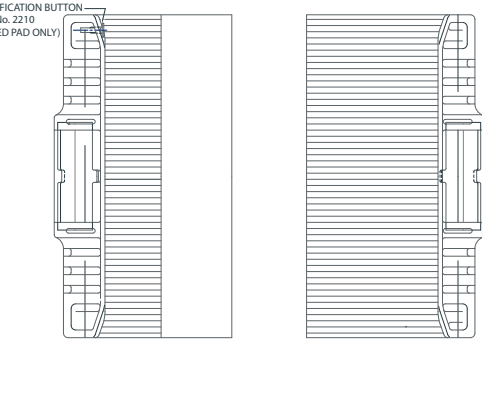Designation	Suit Rail	Rail Foot Width	Drawing	
2217 Not adjustable used at Insulated Joints	RE68kg / 136lb	152mm		
2218 Not adjustable used at Insulated Joints	AS53kg, AS60kg	146mm		
2219 Not adjustable used at Insulated Joints	AS41kg, AS47kg and AS50kg	127mm		
2220 Gauge adjustable used at Insulated Joints	NZR50kg	132mm	<p data-bbox="501 612 650 651">WHITE IDENTIFICATION BUTTON PART No. 2210 (IN THICK SIDED PAD ONLY)</p> 	
2221 Gauge adjustable used at Insulated Joints	AS41kg, AS47kg and AS50kg	127mm		

TRAK-LOK SPACERS

The Trak-Lok Fastening System includes a range of both insulated and non-insulated spacers to allow the use of various rail sizes in the one seat.







All spacers are manufactured in accordance with AS 1085.19-2003.



Insulated Spacers

Part Number	Where Used	Drawings
2509	<p>This Spacer (2 off required per rail seat) locates AS47 or AS50 rails in 146mm Insulated Rail Seat in association with Insulated Pad Part No 2212.</p> <p>This Spacer (2 off per rail seat) also locates AS31 rails in an AS41 Insulated rail seat in association with Insulated Pad Part No's 2213 & 2214.</p>	
2518	<p>This Spacer located on the "Field" side of DKA42 rails in 127mm Insulated Rails Seat in association with Insulation Pad Part No 2213 and Spacer Part No 2518.</p>	
2519	<p>This Spacer located on the "Gauge" side of DKA42 rails in 127mm Insulated Rails Seat in association with Insulation Pad Part No 2213 and Spacer Part No 2518.</p>	
2557	<p>This Spacer located on the "Field" side of WA60lb rails in 127mm Insulated Rail Seat in association with Insulated Pad Part No 2213 and Spacer Part No 2509.</p>	
2534	<p>This Spacer locates AS47 or AS50 rails at joints in 146mm Insulated Rail Seat in association with Joint Insulation Pad Part No 2218.</p>	

Non-Insulated Spacers

Part Number	Where Used	Drawings
2517	This Spacer located on the "Field" side of DKA42 rails in an AS41 rail seat in conjunction with Spacer Part No 2252.	
2521	This Spacer located on the "Field" side in conjunction with Spacer Part No 2522 located on the "Gauge" side used to locate WA60lb rails in rail seats designed for AS41 rails.	
2522	This Spacer located on the "Gauge" side in conjunction with Spacer Part No 2521 located on the "Field" side used to locate WA60lb rails in rail seats designed for AS41 rails.	
2528	This Spacer (2 off per rail seat) used to locate AS31 rails in rails seats designed for AS41 rails.	
2529	This Spacer (one per sleeper used to maintain gauge when used with AS41 or AS47/50 rails in rail adjustable steel sleepers.	
2530	This Spacer (2 off per rail seat) used to locate AS47 / AS50 rails in rails seats designed for AS53 / AS60 rails.	
2535	This Spacer (2 off per rail seat) used to locate AS31 rails in rails seats designed for AS41 rails at Fishplated Joints.	

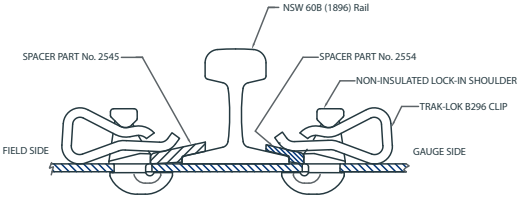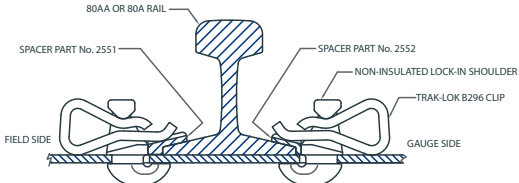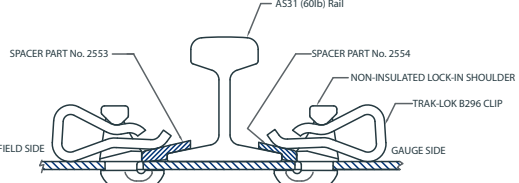Part Number	Where Used	Drawings
2537	This Spacer (2 off per rail seat) used to locate AS47 / AS50 rails in rail seats designed for AS53 / AS60 rails at Fishplated Joints.	
2545	This Spacer located on the "Field" side in conjunction with Spacer Part No 2554 located on the "Gauge" side used to locate NSW60B (1896) rails in rail seats designed for AS53 rails.	
2551	This Spacer located on the "Field" side in conjunction with Spacer Part No 2552 located on the "Gauge" side used to locate 80A and 80AA rails in rail seats designed for AS53 rails.	
2552	This Spacer located on the "Gauge" side in conjunction with Spacer Part No 2551 located on the "Field" side used to locate 80A and 80AA rails in rail seats designed for AS53 rails.	
2553	This Spacer located on the "Field" side in conjunction with Spacer Part No 2554 located on the "Gauge" side used to locate AS31 (60lb) rails in rail seats designed for AS53 rails.	
2554	This Spacer located on the "Gauge" side in conjunction with Spacer Part No 2553 located on the "Field" side used to locate AS31 (60lb) rails in rail seats designed for AS53 rails.	

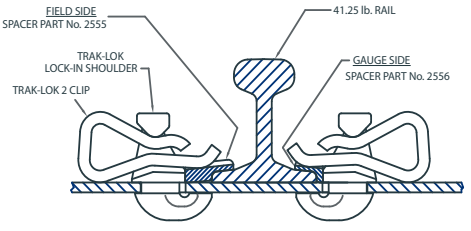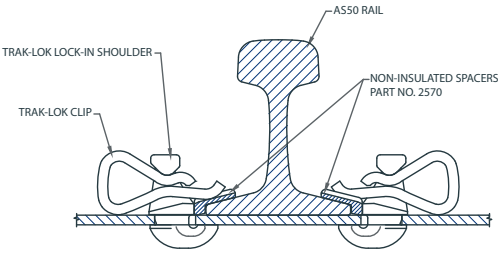Part Number	Where Used	Drawings
2555	This Spacer located on the "Field" side in conjunction with Spacer Part No 2556 located on the "Gauge" side used to locate QR41.25lb or NSW71.5D rails in rail seats designed for AS53 rails.	
2556	This Spacer located on the "Gauge" side in conjunction with Spacer Part No 2555 located on the "Field" side used to locate QR41.25lb or NSW71.5D rails in rail seats designed for AS53 rails.	
2570	This Spacer (2 off per rail seat) used to locate AS50 rails in rail seats designed for AS60 rails.	

NOTE: Other Spacer configurations can be designed to suit special specific installation requirements.
Customers to check Spacer availability prior to ordering as tooling for Spacers may be life expired and require replacement.

Spacer Dimensions

Spacer	Width		Angle	F/Plate Joint Spacer	Width		Angle
	Dist (mm)	Tolerance (mm)			Dist (mm)	Tolerance (mm)	
Insulated Spacers							
2509	9.5	+/- 0.1	12.5 deg				
2518	5.0	+/- 0.1	12.5 deg	2534	9.5	+/- 0.1	12.5deg
2519	12.0	+/- 0.1	12.5 deg				
2557	16.5	+/- 0.1	12.5 deg				
Non-Insulated Spacers							
2517	11.1	+/- 0.5	13 deg 0'				
2521	17.5	+/- 0.5	5 deg 43'				
2522	9.0	+/- 0.5	13 deg 12'				
2528	9.5	+/- 0.5	11deg 18'	2535	9.5	+/- 0.5	11deg 18'
2529	6.5	+/- 0.5	11deg 18'				
2530	9.5	+/- 0.5	11deg 18'	2537	9.5	+/- 0.5	11deg 18'
2545	30.0	+/- 0.5	13 deg 30'				
2551	14.0	+/- 0.5	13 deg 0'				
2552	5.0	+/- 0.5	13 deg 0'				
2553	24.0	+/- 0.5	11deg 18'				
2554	14.0	+/- 0.5	11deg 18'				
2555	20.5	+/- 0.5	6 deg 0'				
2556	4.8	+/- 0.5	6 deg 0'				
2570	9.5	+/- 0.5	14 deg 0'				

Common Spacer Configurations

53kg rail steel sleeper system

					Design Rail Size	Head Width	Rail Height	Rail Foot Width
Rail to be Fitted					53kg	70	157.1	146
Rail Size	Head Width	Rail Height	Rail Foot Width	Ins or NI	Gauge Side Spacer No.	Field Side Spacer No.	Gauge achieved	Where Commonly Used
47kg Rail	70	141.3	127	NI	2530	2530	nom	Common
50kg Rail	70	154	127	NI	2530	2530	nom	Common
41kg Rail	63.5	136.5	127	NI	2552	2551	nom	Common
80AS ^A 1900	63.5	127	127	NI	2552	2551	nom	Common
80B 1928	63.5	136.5	127	NI	2552	2551	nom	Common
80A ^A 1907	63.5	128.6	127	NI	2552	2551	nom	Common
31kg Rail	63.5	117.5	108	NI	2554	2553	-1mm	Common
60B 1896	57.9	109.5	101.6	NI	2554	2545	-1mm	NSW
60AS B ^A 1907	57.9	111.1	101.6	NI	2554	2545	-1mm	NSW
71 1/2 1875	57.1	120.6	120.6	NI	2556	2555	-1mm	NSW
47kg Rail	70	141.3	127	Ins	2509	2509	nom	Common
50kg Rail	70	154	127	Ins	2509	2509	nom	Common

50kg rail steel sleeper system

					Design Rail Size	Head Width	Rail Height	Rail Foot Width
Rail to be Fitted					50kg	70	154	146
Rail Size	Head Width	Rail Height	Rail Foot Width	Ins or NI	Gauge Side Spacer No.	Field Side Spacer No.	Gauge achieved	Where Commonly Used
WA 60lb	53.9	115	101.6	Ins	2509	2557	nom	WA

47kg rail steel sleeper system

					Design Rail Size	Head Width	Rail Height	Rail Foot Width
Rail to be Fitted					47kg	70	141.3	127
Rail Size	Head Width	Rail Height	Rail Foot Width	Ins or NI	Gauge Side Spacer No.	Field Side Spacer No.	Gauge achieved	Where Commonly Used
WA 60lb	53.9	115	101.6	Ins	2509	2557	nom	WA

41kg rail steel sleeper system

					Design Rail Size	Head Width	Rail Height	Rail Foot Width
Rail to be Fitted					41kg	63.5	136.5	127
Rail Size	Head Width	Rail Height	Rail Foot Width	Ins or NI	Gauge Side Spacer No.	Field Side Spacer No.	Gauge achieved	Where Commonly Used
31kg	63.5	117.5	108	NI	2528	2528	nom	Common
DKA 42kg	68.5	138	110	NI	2517*	2552	-1mm	Tasmania
60B or 63lb	63.5	117.5	108	NI	2528	2528	nom	Tasmania
75lb	61.9	122.2	122.2	NI	Nil	2556	-2mm	Tasmania
WA 60lb	53.9	115	101.6	NI	2522	2521	nom	WA
31kg	63.5	117.5	108	Ins	2509	2509	nom	Common
DKA 42kg	68.5	138	110	Ins	2519	2518	nom	Tasmania
60B or 63lb	63.5	117.5	108	Ins	2509	2509	nom	Tasmania
75lb	61.9	122.2	122.2	Ins	Nil	2518	-1mm	Tasmania

* Tooling not available for this Spacer at the present time.

60lb rail steel sleeper system



					Design Rail Size	Head Width	Rail Height	Rail Foot Width
Rail to be Fitted					60lb	63.5	117.5	108
Rail Size	Head Width	Rail Height	Rail Foot Width	Ins or NI	Gauge Side Spacer No.	Field Side Spacer No.	Gauge achieved	Where Commonly Used
41.25lb	47.6	93.7	82.6	NI	2556	2555	nom	QR




TURNOUT BEARERS AND SPECIAL TRACKWORK




Liberty OneSteel also supplies both Insulated and Non-Insulated steel bearers for turnouts, splay rails and guard rail sleepers to meet customer designs and customer supplied drawings. Steel bearers enable rapid assembly of turnouts whilst ensuring the geometry of the turnout is achieved and provide similar benefits of steel sleepers.


TRAK-LOK INSTALLATION AND REMOVAL TOOLS

Trak-Lok steel sleeper systems come complete with a full range of tools to enable the safe application and removal of Trak-Lok Resilient Fastening Clips.

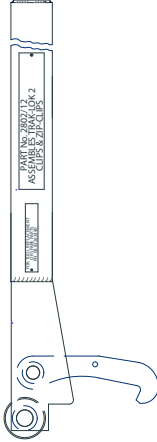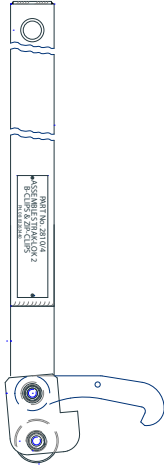

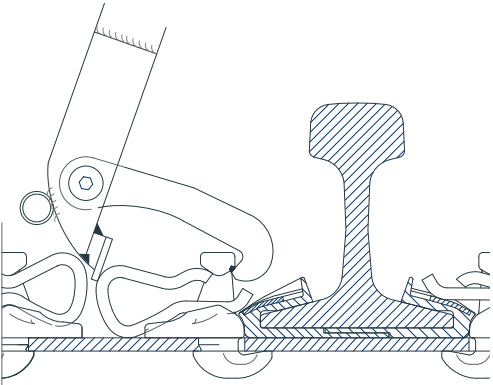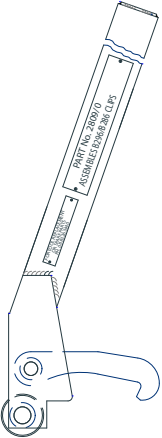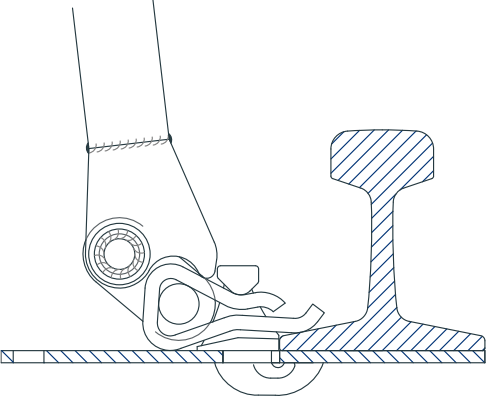Part Number	Where Used	Drawings
2802	Installation of B296, B286 and Zip9 Trak-Lok Clips. Supplied with straight handle.	 <p>Technical drawing of a straight handle tool. The handle is long and narrow with a hook-shaped end and a circular end. The drawing includes a label with the following text: PART NO. 2802 / 1000, SPEC. CLIP & ZIP 9.</p>
2810	Installation of B296, B286 and Zip9 Trak-Lok Clips. Supplied with T handle.	 <p>Technical drawing of a T-handle tool. The handle is long and narrow with a hook-shaped end and a circular end. The drawing includes a label with the following text: PART NO. 2810 / 1000, SPEC. CLIP & ZIP 9.</p>

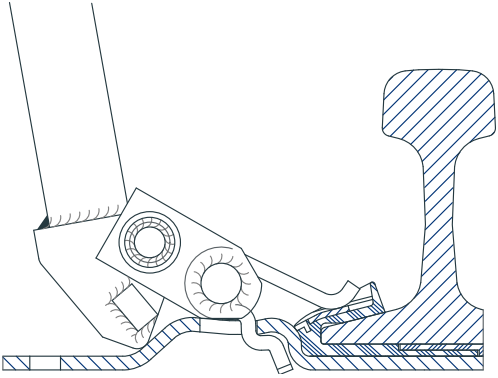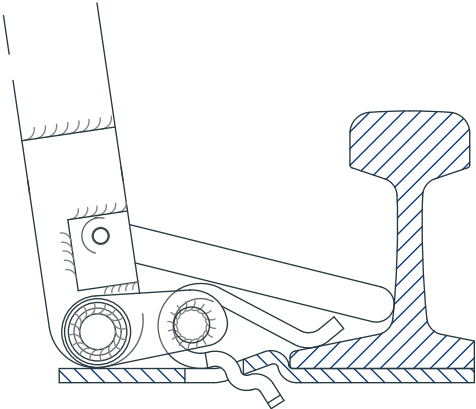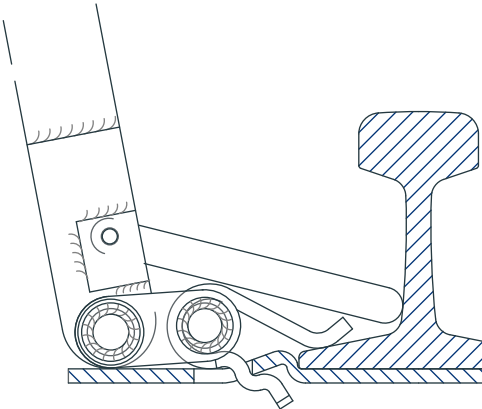Part Number	Where Used	Drawings
2803	Installation of B296, B286 and Zip9 Trak-Lok Clips. For use in dual gauge track.	
2809	Installation of B296, B286 and Zip9 Trak-Lok Clips. Supplied with angled handle.	
2902	Removal of B296, B286 and Zip9 Trak-Lok Clips.	

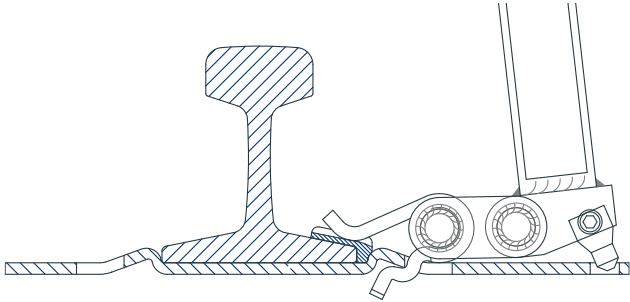Part Number	Where Used	Drawings
2903	Removal of S193L Trak-Lok Clips.	
2904	Removal of S195L Trak-Lok Clips on rails with a 108mm rail foot.	
2905	Removal of JS195L Trak-Lok Clips on rails with a 108mm rail foot.	
2913	Removal of S195L Trak-Lok Clips on rails with a 127mm rail foot.	
2914	Removal of JS195L Trak-Lok Clips on rails with a 127mm rail foot.	
2906	Removal of S187L Trak-Lok Clips on rails with a 127mm rail foot.	
2919	Removal of JS187L Trak-Lok Clips on rails with a 127mm rail foot.	

Part Number	Where Used	Drawings
2912	Removal of S187L and S195L Trak-Lok Clips on flat Trak-Lok steel sleepers using ballast inspection holes.	

Spare Parts

Part Number	Where Used	Drawings
2806 MK A	Hook Assembly as replacement on Part No's 2802, 2803 and 2809.	
2806 MK B	Roller Assembly as replacement on Part No's 2802 and 2809.	

Motorised Application Machines

Trak-Lok 2 Clips can be installed and removed using specialised application/removal machines. These machines range in size from push along trolleys to ride on high production machines. For further details please contact your Liberty OneSteel representative.

CAST SLEEPER PLATES

Sleeper Plate Type

Sleeper Plates are manufactured to suit 127mm or 146mm rail foot sizes.

Sleeper Plates are designated as follows:

DSTB – Double Shouldered, Taper Base (1 in 20) Sleeper Plate

DSLB – Double Shouldered, Flat Base Sleeper Plate

Other negotiated types can be produced by Liberty OneSteel to Customer specifications which are not covered by the Standard defined below.

Standards

AS1085 Part 3 – Sleeper Plates.

Hole Sizes


All holes are located in accordance with Liberty OneSteel drawings. Holes are provided in varying configurations to suit the customers fastening requirements. Each sleeper plate has a designated “DF” number that is used to identify the sleeper plate.

When ordering sleeper plates it is only the abbreviated designation as per the drawing heading that is required to be quoted eg. 127 DSTB DF27.


Table of Sleeper Plates

Designation	Drawing Number	Unit Mass (kg)	Plate Width (mm)	Plate Length (mm)	Dog Spike Hole (mm)	Lock Spike Hole (mm)
127 DSLB – DF46	2701	4.49	295	178	18 Square	18 Square
127 DSLB – DF100	2702	7.02	295	203	21 Square	21 Square
127 DSLB – DF68	2700	7.02	295	203	24 Round	18 Square
127 DSTB – DF4	2704	5.01	295	178	18 Square	18 Square
127 DSTB - DF27	2721	5.01	295	178	20.6 Square	17.5 Square
127 DSTB – DF3	2719	5.01	295	178	21 Square	21 Square
127 DSTB – DF3L	2719	TBA	295	203	21 Square	21 Square
127 DSTB – DF10	2705	5.63	295	203	24 Round	18 Square
146 DSLB - DF69	2703	7.07	314	203	24 Round	18 Square
146 DSTB – DF25	2707	TBA	315	180	21 Square	21 Square
146 DSTB – DF25L	2707	6.15	315	205	21 Square	21 Square
146 DSTB – DF30	2706	6.19	315	205	24 Round	18 Square


127 DSLB - DF46

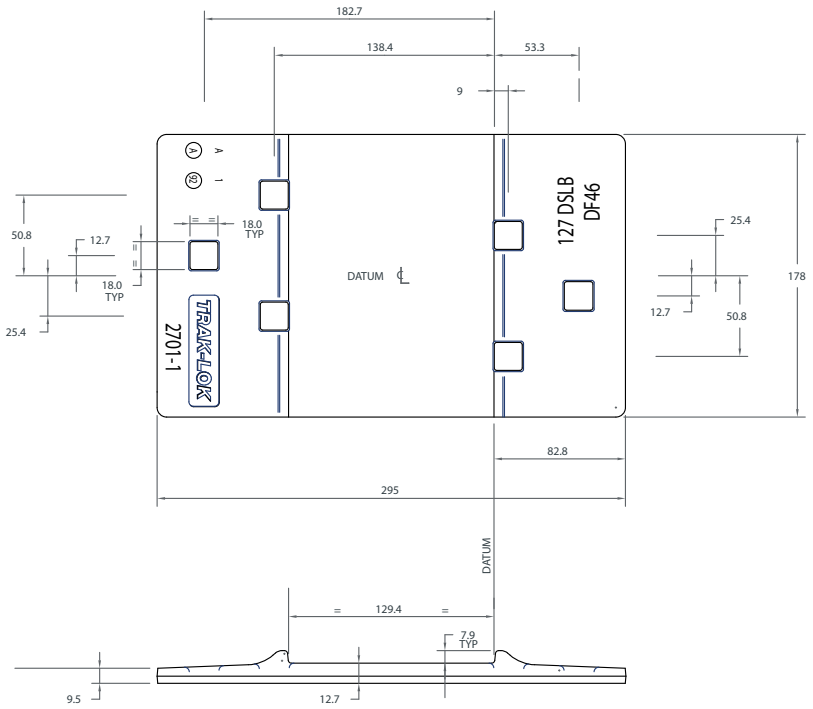


127 DSLB - DF100

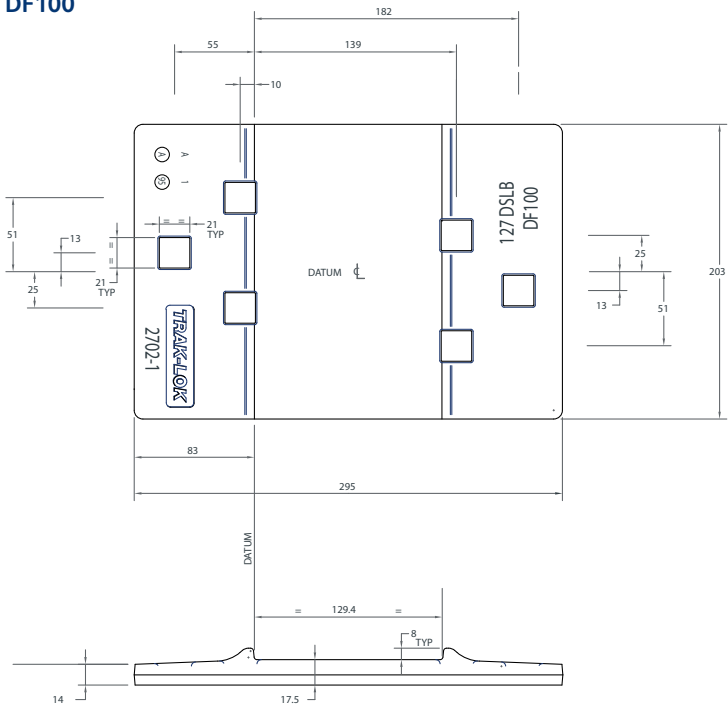


127 DSLB - DF68

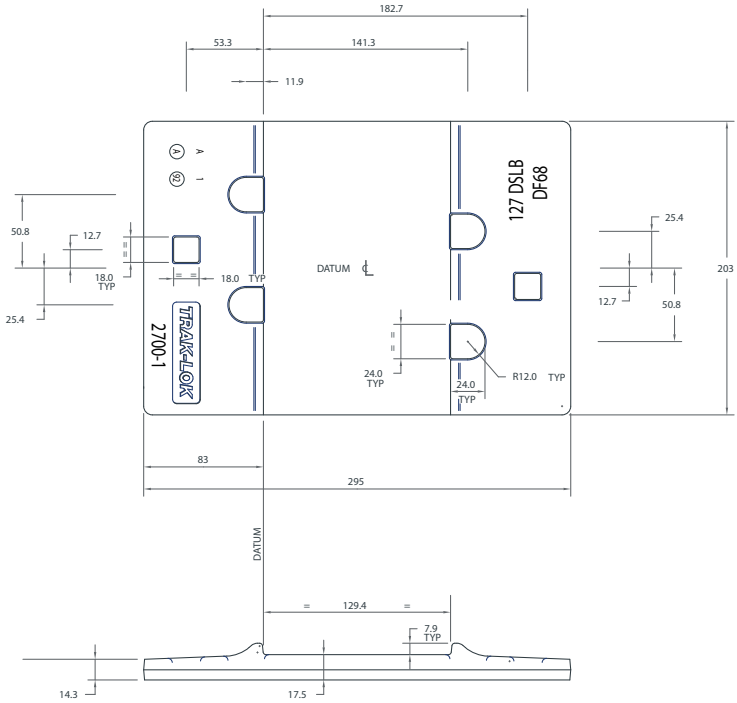


127 DSTB - DF4

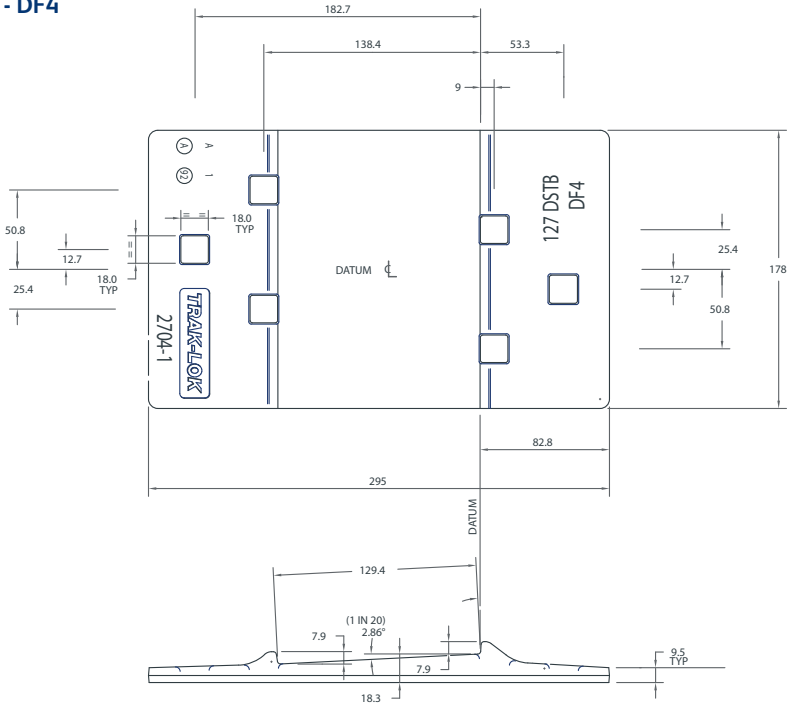


127 DSTB - DF27

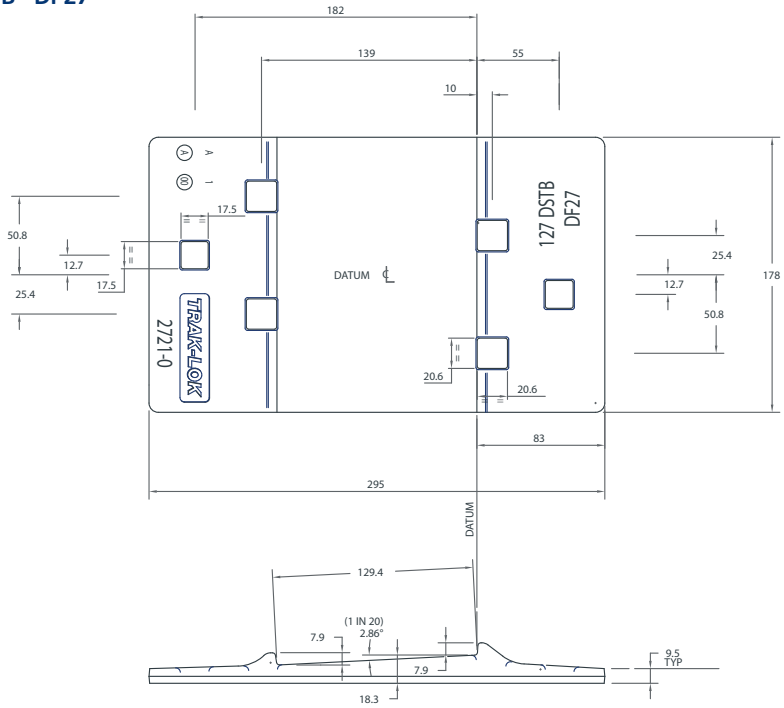


127 DSTB - DF3L & DF3L

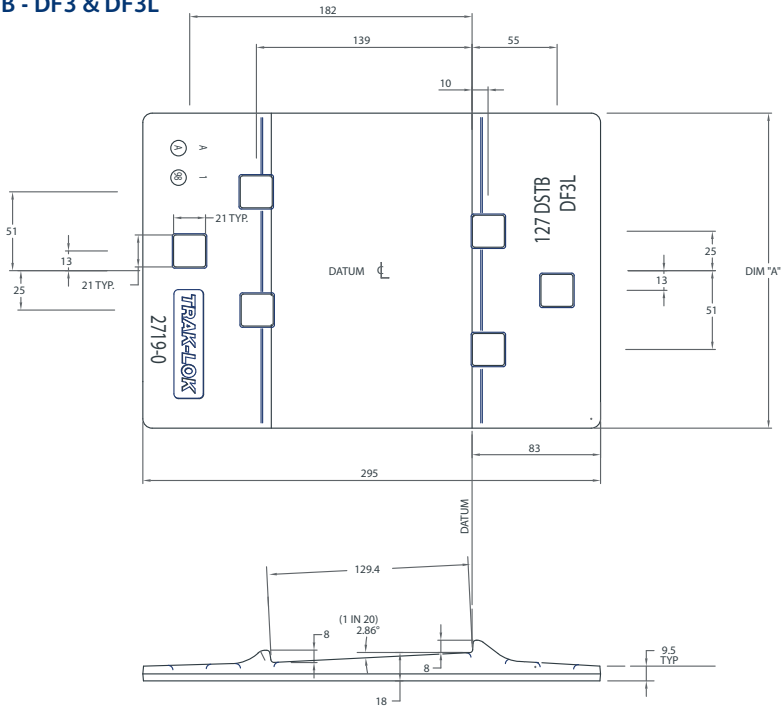


127 DSTB - DF10

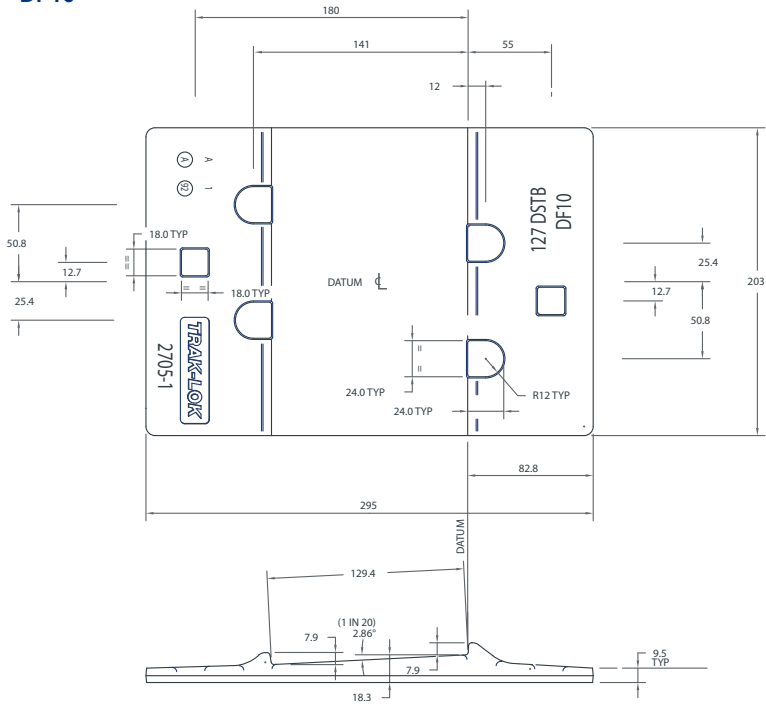


146 DSLB - DF69

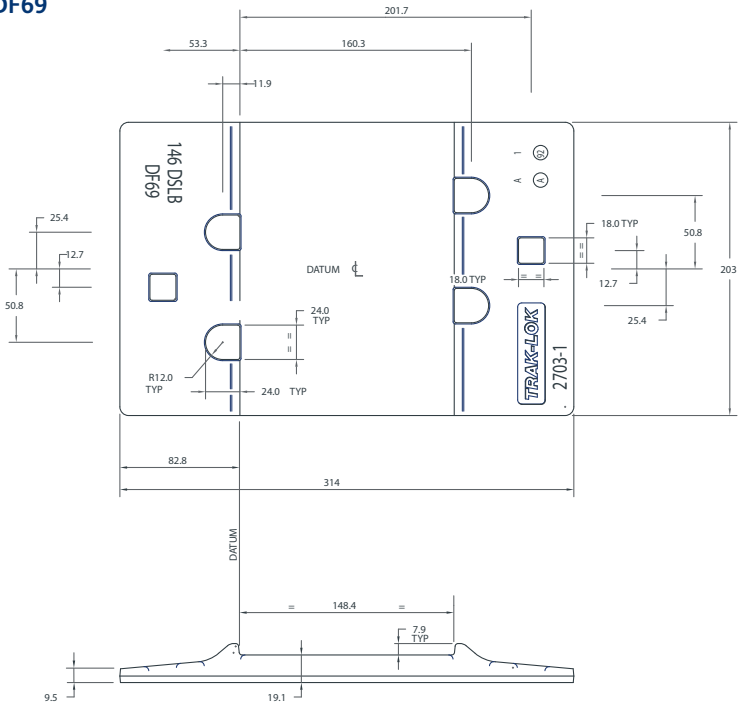

146 DSTB - DF25 & DF25L

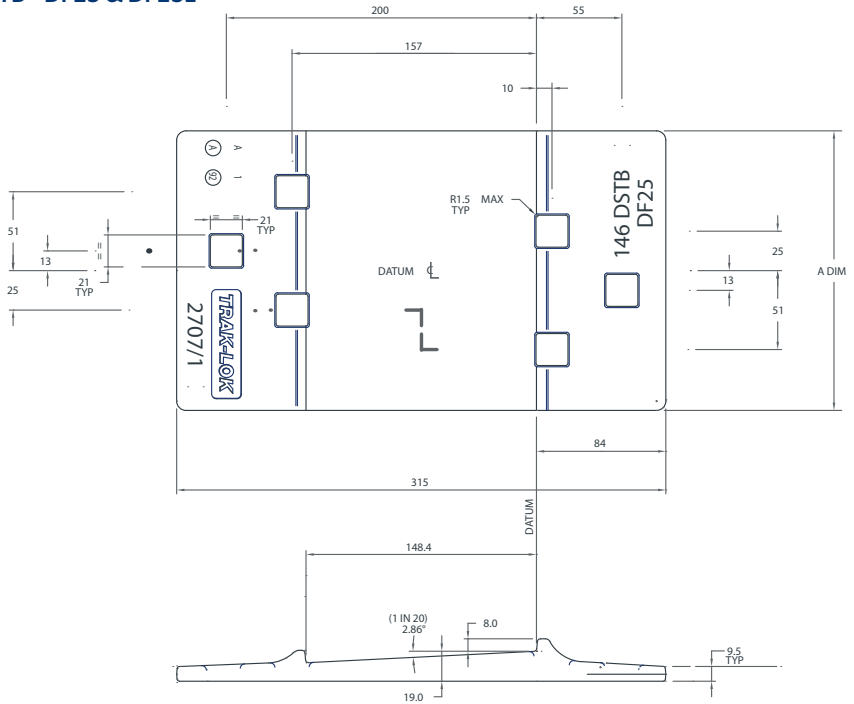

146 DSTB - DF30

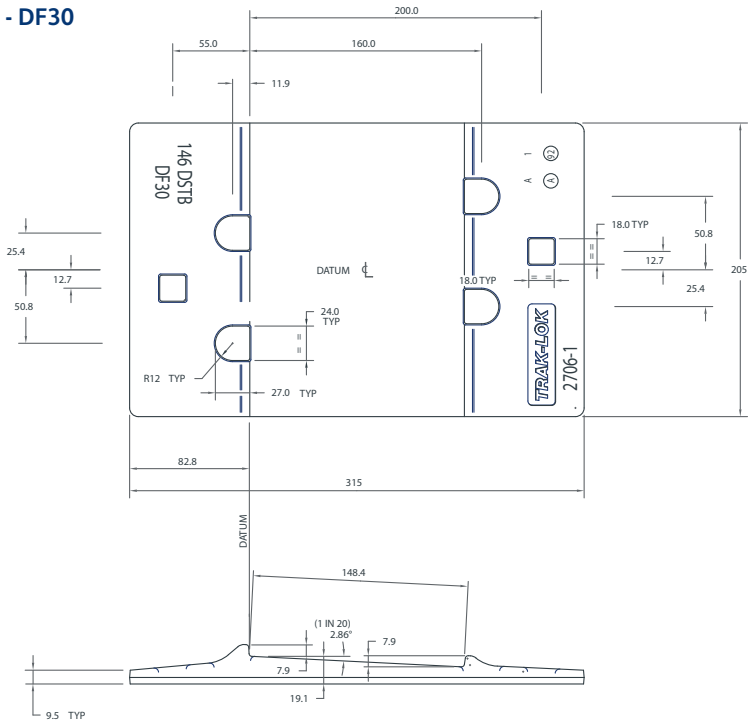



**LIBERTY
ONESTEEL**

Liberty OneSteel

For sales enquiries and/or product information:

T: 1800 178 335

www.libertyonesteel.com

This publication has been prepared by Liberty OneSteel (OneSteel Manufacturing Pty Limited ABN 42 004 651 325). Please note that the specifications and technical data are subject to change without notice and to ensure accuracy, users of this publication are requested to check the information to satisfy themselves and not to rely on the information without first doing so. Unless required by law the company cannot accept any responsibility for any loss, damage or consequence resulting from the use of this publication. Photographs shown are representative only of typical applications, current at November 2017. This brochure is not an offer to trade and shall not form any part of the trading terms in any transaction.

Trak-Lok® is a registered trade mark of OneSteel Manufacturing Pty Limited ABN 42004651 325. ©Copyright 2017. November 2017. TS3258